





JT 240 SW

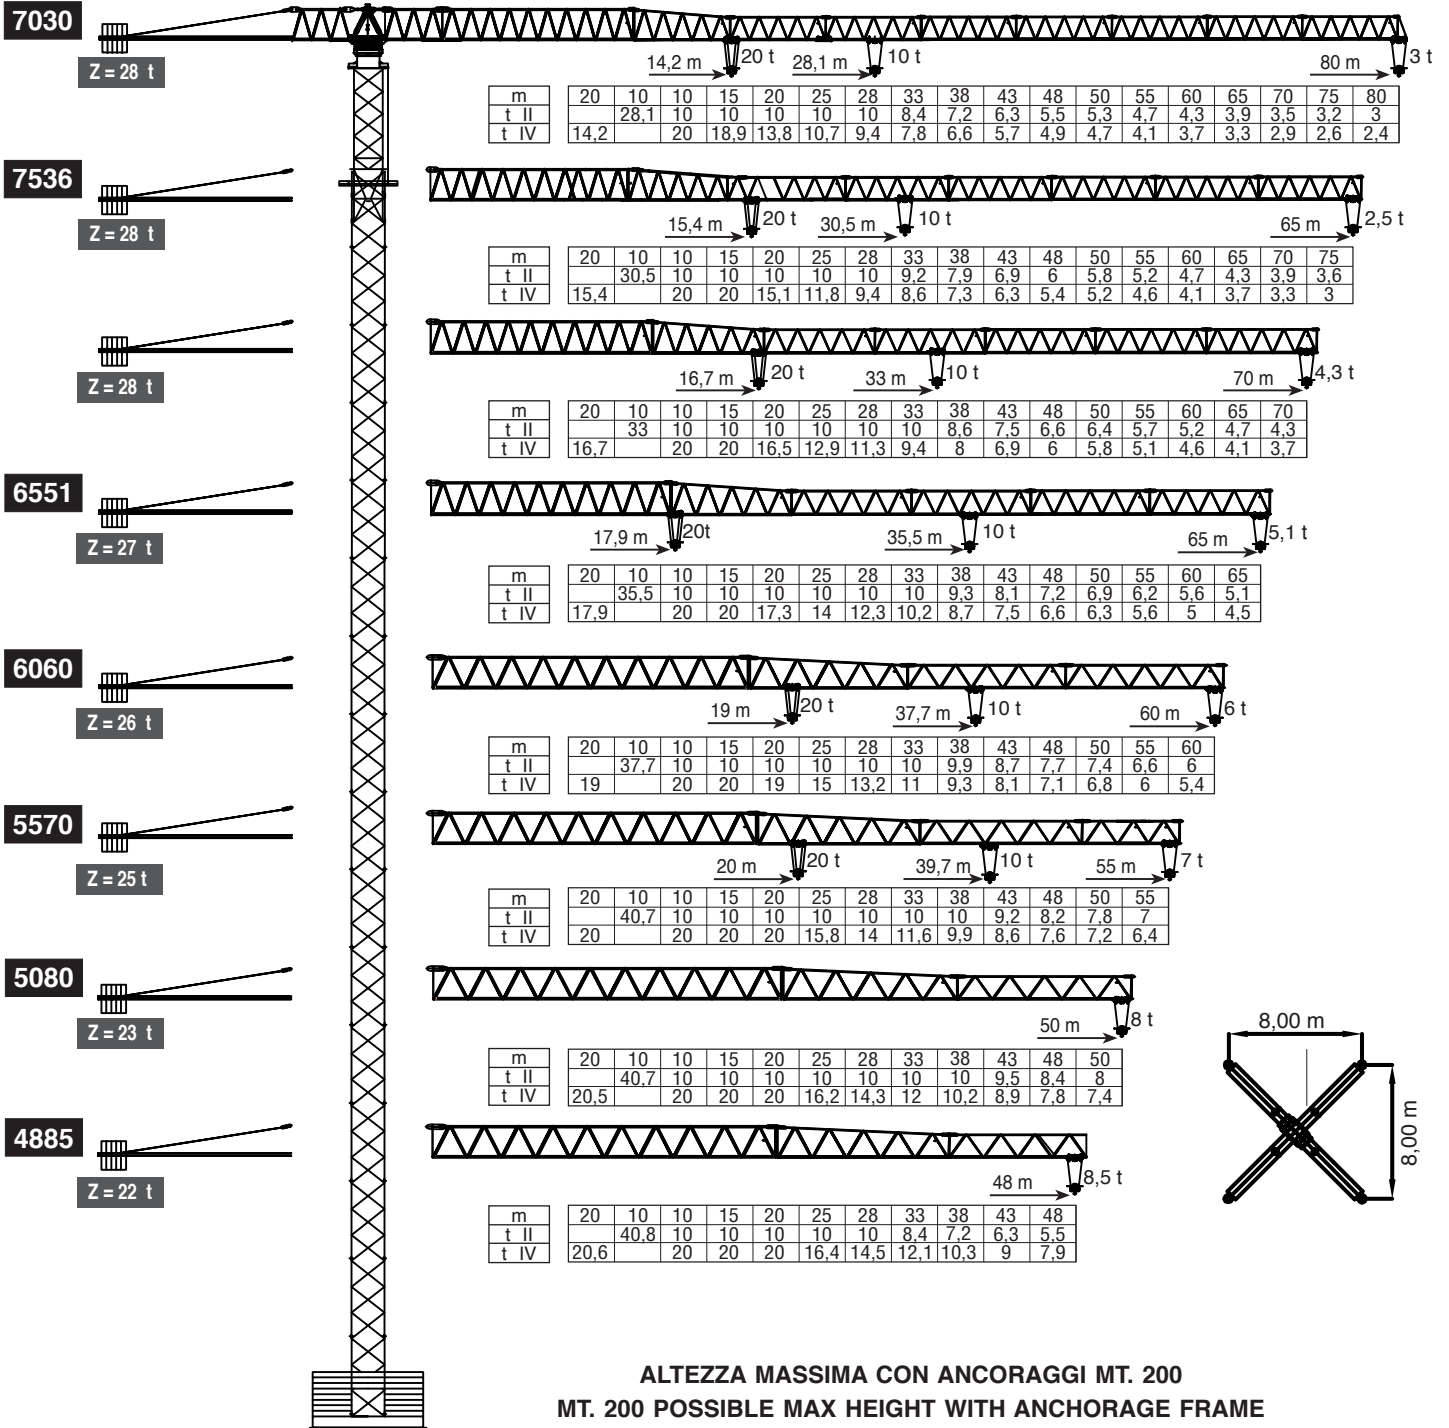


ALTEZZA MASSIMA CON ANCORAGGI MT. 200
MT. 200 POSSIBLE MAX HEIGHT WITH ANCHORAGE FRAME


DENOMINAZIONE DENOMINATION	SCHEMA/SKETCH	A (m)	B (m)	C (m)	PESO/WEIGHT (kg)
ELEMENTO BRACCIO BR39 JIB ELEMENT BR39		11,75	1,96	1,50	2370
ELEMENTO BRACCIO BR40 JIB ELEMENT BR40		11,75	1,96	1,50	2189
ELEMENTO BRACCIO BR41 JIB ELEMENT BR41		5,90	1,96	1,50	980
ELEMENTO BRACCIO BR42 JIB ELEMENT BR42		5,90	1,96	1,50	880
ELEMENTO BRACCIO BR43 JIB ELEMENT BR43		11,75	1,96	1,50	1800
ELEMENTO BRACCIO BR44 JIB ELEMENT BR44		5,90	1,96	1,50	760
ELEMENTO BRACCIO BR45 JIB ELEMENT BR45		5,90	1,96	1,50	560
ELEMENTO BRACCIO BR46 JIB ELEMENT BR46		5,90	1,96	1,50	480
ELEMENTO BRACCIO BR47 JIB ELEMENT BR47		5,90	1,96	1,50	340
GRUPPO ROTAZIONE SLEWING GROUP		3,90	2,90	2,30	7500
CUSPIDE SPIRE		8,60	1,60	1,60	2690
CONTROFRECCIA PARTE LUNGA COUNTERJIB LONG SIDE		11,30	1,60	0,50	2360
CONTROFRECCIA PARTE CORTA COUNTERJIB SHORT SIDE		5,35	1,60	0,50	1080
TELAIO BASE 3 BASE ELEMENT 3		5,20	2,70	2,70	2200
TELAIO INTERMEDIO 1 INTERMEDIATE ELEMENT 1		4,20	2,02	2,02	1650
TELAIO INTERNO INNER ELEMENT		8,45/5,50	1,75	1,75	4240
TELAIO INTERMEDIO 3 INTERMEDIATE ELEMENT 3		5,420	2,70	2,70	2200
TELAIO BASE T1 BASE ELEMENT T1		8,40	2,02	2,02	3480
TELAIO BASE T2 BASE ELEMENT T2		8,40	2,02	2,02	3480

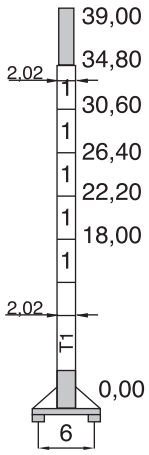


(A)

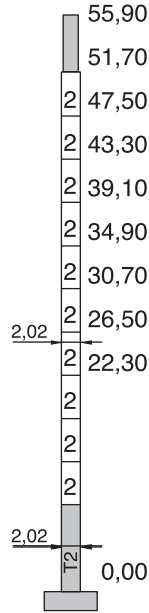

(B)

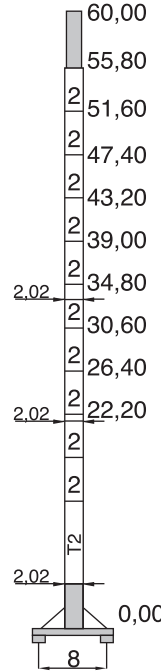

(C)

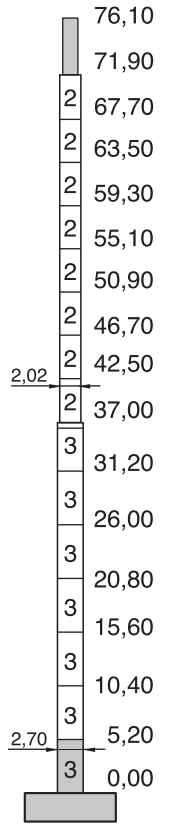

(D)

ARGANI DI SOLLEVAMENTO - HOISTING WINCHES

	Hp	m/1'	Kg	Kg	Hp	m/1'	Kg	Kg
	50	70/35	2500	5000	70	100/50	2250	4500
		45/22	3500	7000		66/33	3500	7000
		30/15	6000	12000		40/20	6000	12000
		16/8	6000	12000		16/8	6000	12000
		4/2	6000	12000		4/2	6000	12000

SENZA CARICO LA VELOCITÀ DI SOLLEVAMENTO AUMENTA DEL 20%


HOISTING SPEED INCREASE MORE THAN 20% WITHOUT LOAD


380/440V	ARGANO	POTENZA MAX	GRUPPO GEN.
50/60 HZ	WINCH	MAIN SUPPLY	GENER.
	50 HP	65 KVA	100 KVA
	70 HP	95 KVA	120 KVA

	5,5 KW	10/25/50 m/1	R 56
	3 x 65 Nm	0-0,8 rpm	ROT. F.
	R 90	25/50 m/min	4x 35/35 Nm

1 - 2,02 x 2,02 mt
2 - 2,70 x 2,70 mt

VERSIONE CON TORRE MONOLITICA
MONOLITIC TOWER VERSION

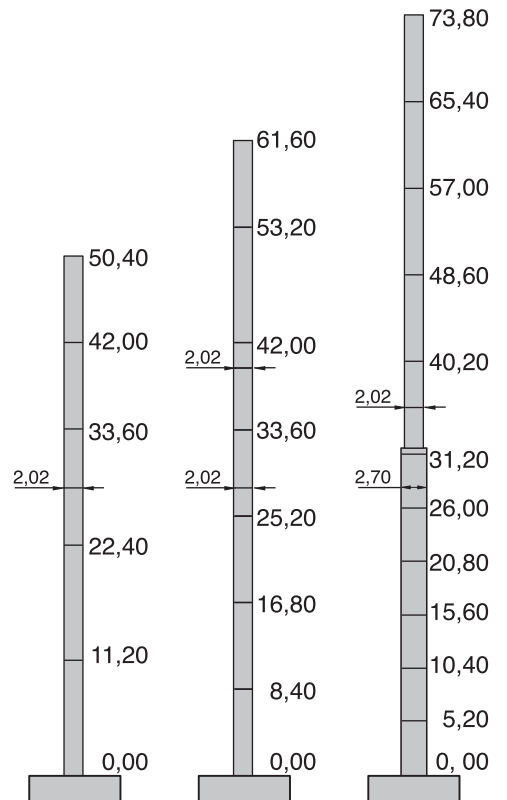

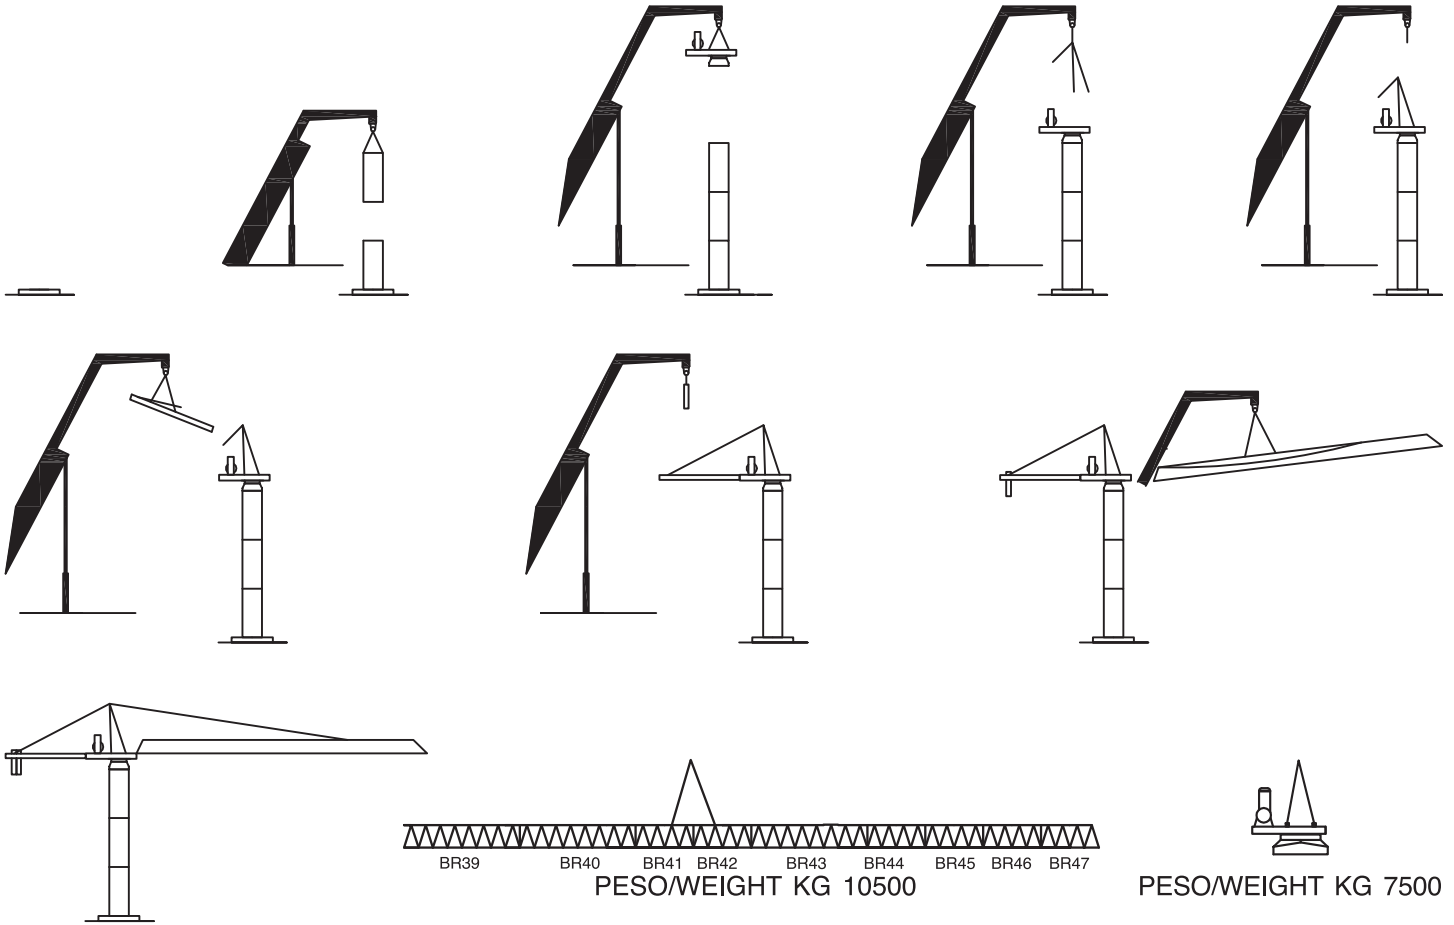

DIMENSIONE TORRE (mt) / MAST DIMENSION					
ALTEZZA LIBERA HEIGHT (mt)	2,02 x 2,02 (mt)		2,70 x 2,70 (mt)	TELAIO INTERNO	TELAIO RACCORDO
	4,20	8,40	5,20	5,50	0,60
34,90	5	1		1	
39,10	6	1		1	
43,30	7	1		1	
47,50	8	1		1	
51,70	9	1		1	
55,90	10	1		1	
59,30	6		5	1	1
63,50	6		6	1	1
67,70	7		6	1	1
71,90	7		7	1	1
76,10	8		7	1	1